


单芯高电压连接器

40KV 单芯高电压同轴连接器

特性:

- 1.最高可达 60KV，DC-20A
- 2.电缆直径最大可达 6.5mm
- 3.四方或者圆法兰固定
- 4.焊接或者螺纹连接
- 5.强度高
- 6.耐高温


连接类型	焊接/螺纹连接
屏蔽形式	壳体
外壳材料	黄铜
接插件材料	镀镍
绝缘体材料	PTFE
温度范围	-55-200°C
电阻率	10 ^ 16 Ohm/cm
导电率	Max. 300 μOhm

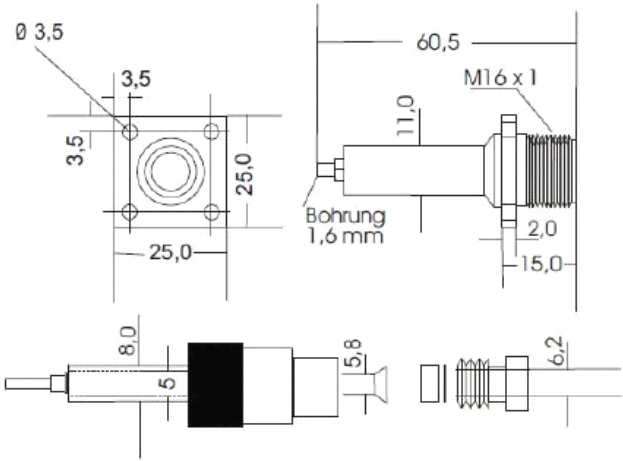


主要技术特性 Technical Characteristics

型号	HSB10	HSB20	HSB30	HSB40	HSB11	HSB21	HSB31
操作电压 KV	10	20	30	40	10	20	30
测试电压 KV	15	30	45	60	15	30	45
电缆 A	20	20	20	20	20	20	20
电 缆 直 径 mm	导体直径	1.5	1.5	1.5	1.5	1.5	1.5
	电缆外径	6.5	6.5	6.5	6.5	6.5	6.5


HS/HB10

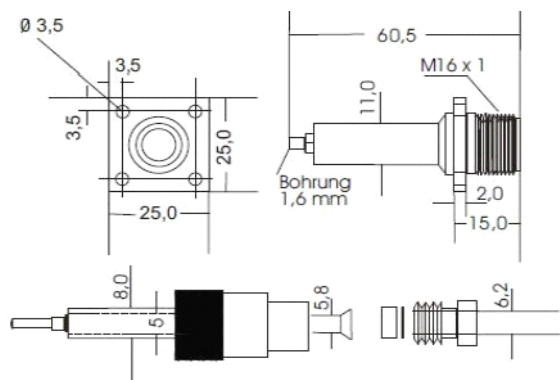


HS/HB11

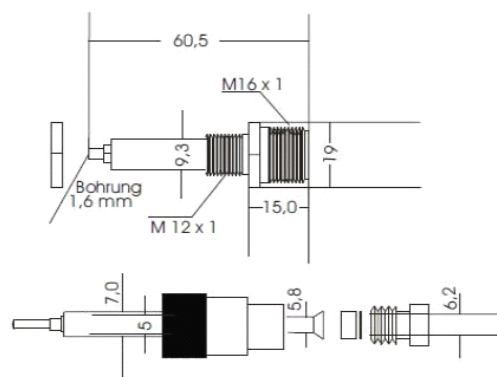


HS/HB20

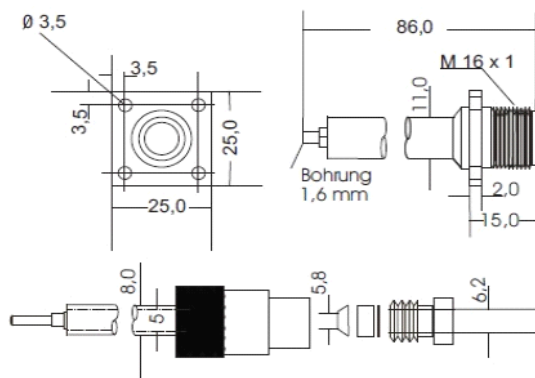


HS/HB21

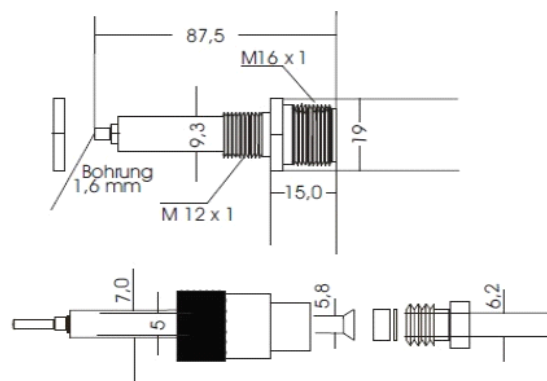

HS/HB30

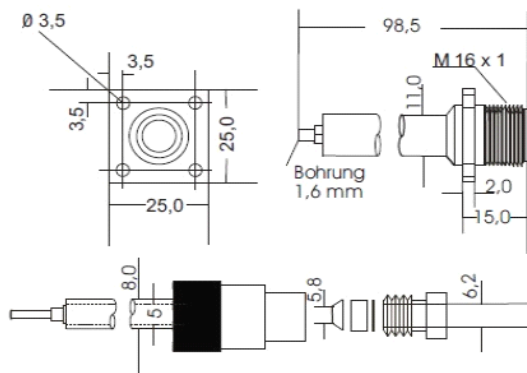

HS/HB31

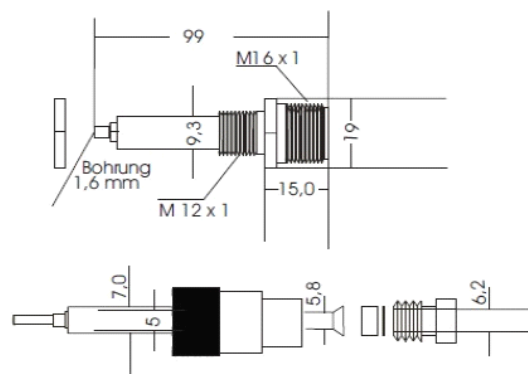

HS/HB40

